

Commissioning of the NPDGamma Detector Array:
Counting statistics in current mode operation and parity violation in the capture of
cold neutrons on B_4C and ^{27}Al .

M.T. Gericke^{a, b}, J.D. Bowman^a, R.D. Carlini^j, T.E. Chupp^h,
K.P. Coulter^h, M. Dabaghyan^d, D. Desai^g, S.J. Freedman^l, T.R. Gentile^m, R.C. Gillis^c,
G.L. Greene^{f, g}, F.W. Hersman^d, T. Ino^k, S. Ishimoto^k, G.L. Jonesⁿ, B. Lauss^l,
M.B. Leuschner^b, B. Losowski^b, R. Mahurin^g, Y. Masuda^k, G.S. Mitchell^a, S. Muto^k,
H. Nann^b, S.A. Page^c, S.I. Penttilä^a, W.D. Ramsay^e, S. Santra^b, P.-N. Seo^a,
E.I. Sharapov^o, T.B. Smithⁱ, W.M. Snow^b, W.S. Wilburn^a, V. Yuan^a, H. Zhu^d

^aLos Alamos National Laboratory, Los Alamos, New Mexico 87545, USA

^bIndiana University, Bloomington, Indiana 47405, USA

^cUniversity of Manitoba, Winnipeg, Manitoba R3T 2N2, Canada

^dUniversity of New Hampshire, Durham, NH 03824, USA

^eTRIUMF, 4004 Wesbrook Mall, Vancouver, British Columbia V6T 2A3, Canada

^fOak Ridge National Laboratory, Oak Ridge, TN 37831, USA

^gUniversity of Tennessee, Knoxville, TN 37996, USA

^hUniversity of Michigan, Ann Arbor, MI 48104, USA

ⁱUniversity of Dayton, Dayton, OH 45469, USA

^jThomas Jefferson National Accelerator Facility, Newport News VA 23606, USA

^kHigh Energy Accelerator Research Organization
(KEK), Tsukuba-shi, 305-0801, Japan

^lUniversity of California, Berkeley, CA 94720-7300, USA

^mNational Institute of Standards and Technology, Gaithersburg, MD 20899-0001, USA

ⁿHamilton College, Clinton, NY 13323, USA

^oJoint Institute for Nuclear Research, Dubna, Russia

Abstract

The NPDGamma γ -ray detector has been built to measure, with high accuracy, the size of the small parity-violating asymmetry in the angular distribution of gamma rays from the capture of polarized cold neutrons by protons. The

high cold neutron flux at the LANSCE spallation neutron source and control of systematic errors require the use of current mode detection with vacuum photo diodes and low-noise solid-state preamplifiers. We show that the detector array operates at counting statistics and that the asymmetries due to B_4C and ^{27}Al are zero to within 2×10^{-6} and 7×10^{-7} respectively. Boron and aluminum are used throughout the experiment. The results presented here are preliminary.

Keywords: CsI; Gamma; Detector; Current Mode; Parity Violation; Neutron Capture; Shot Noise.

1 Introduction

The NPDGamma experiment is under commissioning at the Los Alamos Neutron Scattering Center (LANSCE). It is the first experiment that was designed for the new pulsed high flux cold beam line, flight path 12, at LANSCE. NPDGamma will determine the very small weak pion-nucleon coupling constant f_π in the nucleon-nucleon interaction [1, 2, 3, 4, 5]. This coupling constant is directly proportional to the parity-violating up-down asymmetry A_γ in the angular distribution of 2.2-MeV gamma rays with respect to the neutron spin direction in the reaction $\vec{n} + p \rightarrow d + \gamma$. The asymmetry has a predicted size of 5×10^{-8} and our goal is to measure it to 10%.

The small size of the asymmetry and the high proposed measurement precision impose heavy requirements on the performance of the beam line and apparatus. It is necessary to achieve high counting statistics while at the same time suppressing any systematic errors below the statistical limit. The detector array was designed to satisfy these requirements [6, 7].

The experiment uses an intense, pulsed (20 Hz), cold neutron beam at LANSCE [8]. The beam is transversely polarized by transmission through a polarized ^3He cell. Three ^3He ion chambers are used to monitor beam intensity and measure beam polarization through transmission ratios. A radio frequency spin flipper is used to reverse the neutron spin direction on a pulse by pulse basis. For the production experiment the neutrons will capture in a 21 liter liquid para-hydrogen target. The gamma rays from the capture are detected by an array of 48 CsI(Tl) detectors. The entire apparatus is located in a homogeneous 1 mT magnetic field to maintain the neutron spin downstream of the polarizer. A detailed introduction to the experiment is given in [1].

During commissioning the radiative neutron capture on various target materials was investigated to look for any false asymmetry which may enter as a systematic effect while taking data with the hydrogen target. The measurements concentrated on materials that can be found within the experimental apparatus and which are interacting with the neutrons. The targets used included Al, Cu, In, ^6Li and B_4C .

Boron is used throughout the experiment, for neutron shielding and to collimate the beam. Aluminum is used in most of the equipment and the beam encounters several millimeter of it, primarily in the windows of the hydrogen target. It is therefore necessary to establish the size of the γ -asymmetry due to neutron capture on both of these elements. A preliminary result on the aluminum asymmetry is presented in [1]. The preliminary asymmetry result for the B_4C data taken so far is presented here. Further analysis on all targets is currently underway.

To establish that the array operates at counting statistics, it is desirable to conduct a neutron capture experiment in which a single neutron capture produces at most

one outgoing gamma ray with a known energy. The reaction $^{10}\text{B}(n,\alpha)^7\text{Li}$ produces an excited ^7Li nucleus with a branching ratio of 94%. The excited nucleus decays, emitting a 0.48 MeV gamma ray, 100% of the time. As a result, the width in the data taken with a B_4C target can be compared to the width expected from neutron counting statistics.

Based on LANSCE FP12 beam brightness measurements and Monte Carlo calculations [8], the predicted average gamma rate into a single detector is 20 MHz. At that rate, pulse counting is not possible, given the long decay time of the scintillation light pulses in CsI. The detectors are therefore operated in current mode. The scintillation light from the CsI detectors is converted to current signals using vacuum photo diodes (VPD), and the photo-currents are converted to voltages and amplified by solid-state electronics [7].

The 48 detectors are grouped in rings of 12 detectors each (Figure 1) and arranged in a cylindrical pattern around the neutron capture target used.

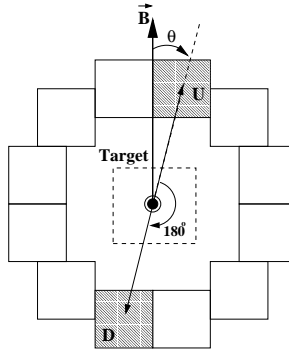


Figure 1: A ring of detectors and one up-down pair, as seen in beam direction. \vec{B} is the magnetic holding field defining the direction of the neutron polarization.

The detector signals are sampled by 16 bit ADCs and integrated over a 0.4 ms

period, defining the time bin width at which the detector signals are stored. For each neutron pulse, a total of 100 time bins per detector is stored, followed by a 10 ms break before the next frame of neutrons arrives. This 50 ms period defines a *macro pulse* of data .

The remainder of this paper gives a short description of the counting statistics and asymmetry tests performed and the relevant preliminary results obtained.

2 Achieving counting statistics in current mode operation

In current mode detection, counting statistics appears as the RMS width in the sample distribution, due to the fluctuation in the number of electrons produced at the photo-cathode of the VPD, as a result of the quasi instantaneous amount of energy deposited in the CsI crystal.

During beam on measurements, the shot noise RMS width is given by [9]

$$\sigma_{I_{\text{shot}}} = \sqrt{2qI} \sqrt{f_B}, \quad (1)$$

where q is the amount of charge created by the photo cathode per detected gamma-ray, I is the average photo-current per detector and f_B is the sampling bandwidth, set by the 0.4 ms time bin width.

The boron target used in this measurement consisted of a 1 cm thick 15 cm by 15 cm sheet of sintered B_4C located in the center of the detector array. The B_4C target is black for cold neutrons. The beam was collimated down to a 10 cm diameter cross-section, so that the target completely covered the beam. Three consecutive

measurements were made. Three 500 s long pedestal runs, without beam, one 500 s data run with beam incident on the target and one 500 s background run with beam but without the target installed.

Because of the single gamma released in the $^{10}\text{B}(\text{n},\alpha)^7\text{Li}$ capture reaction and Eq.(1) a direct comparison can be made between the RMS width expected from counting statistics and the RMS width seen in the data stream. Several factors contribute to the overall width seen in the data stream. Contributions from electronic noise and signals from activation decay in the various materials are measured during beam-off, pedestal runs. Contributions from radiative capture and scattering on materials other than the intended target are measured by performing background runs. Both of these contributions can be removed by subtracting their RMS widths in quadrature from the overall width. In addition, any fluctuations in the magnitude of the signal over the course of the measurement will also contribute to the width. To remove those contributions, the data and background runs were normalized to the beam current and separate variances were calculated for each group of 20 *macro pulses* and then averaged. For all of these calculations a single time bin, corresponding to the peak signal ($E = 14$ meV), was used in each macro pulse.

Figure 2 shows the RMS width for a typical detector, as seen at the preamplifier output. For this detector, using Eq.(1), the measured values for q and I and the gain of the preamplifier circuit, the RMS width expected at the preamplifier output is 5.7 ± 0.3 mV. The error on the expected width is dominated by the accuracy to which we know the efficiency (number of photo-electrons per MeV) of the detector. Additional contributions to the width, that are not currently accounted for, include fluctuations in the amount of energy a gamma-ray actually deposits in the detector

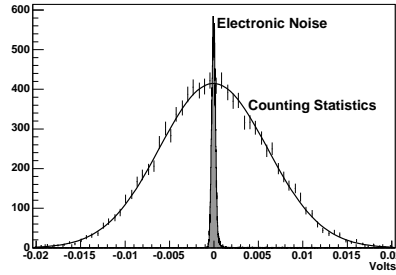


Figure 2: Counting statistics analysis results for a typical detector. The RMS width due to counting statistics is compared to the width seen from pedestal runs (electronic noise). The fit to the beam on, target in data histogram shows an RMS width of 6.1 ± 0.04 mV.

(currently, it is assumed that each photon deposits its full energy) and background due to neutrons that are scattered off the target and subsequently capture in other surrounding materials. An effort to carefully model these effects, using Monte-Carlo methods is currently underway.

Using the known proton current and an appropriate Monte-Carlo model to simulate the transmission of the neutrons through the guide and the experiment, the number of neutrons expected to capture on the B_4C target, for the peak energy, is about 8×10^6 n/ms/pulse. Considering the gamma attenuation in the target as well as the solid angle for the detector, the number of photons into a detector, per time bin is 3×10^4 , so that the relative width is $\frac{1}{\sqrt{N}} \simeq 0.6\%$. Using the corresponding voltage, one expects to see out of the preamplifier, the RMS width expected due to neutron counting statistics is $\simeq 5 \pm 1$ mV. The error is due to the accuracy to which we know the detector efficiency ($\sim 5\%$), the estimate on the accuracy in the number of neutrons capturing in the target ($\sim 5\%$), but mostly due to an error estimate on the

number of gamma rays that will deposit all of their energy in the detector ($\sim 20\%$).

3 The parity violating γ -asymmetry in $^{10}\text{B}(\text{n}, \gamma)^{11}\text{B}$ and $^{27}\text{Al}(\text{n}, \gamma)^{28}\text{Al}$

Due to the 1 mT holding field, surrounding the experimental apparatus, the neutrons are polarized vertically after leaving the ^3He spin filter. While taking hydrogen data, the parity violating asymmetry in n-p capture is therefore seen in a difference of the number of γ -rays going up and down. The cross section is proportional to $1 + A_\gamma \cos \theta$, where θ , is the angle between the neutron polarization and the momentum of the emitted photon. Accordingly, when investigating possible *false* asymmetries, *i.e.* those not due to n-p capture in the hydrogen target, we look for them in the up-down direction with respect to the neutron polarization axis.

The geometry of the B_4C target was described earlier. The aluminum target consisted of 30 sheets of aluminum, each of which was ~ 1.6 mm thick. Each sheet was separated by 5 mm to reduce gamma attenuation in the target. The total target thickness was 5 cm and its cross-section was 9 cm by 9 cm. The target was located in the center of the array.

During the first phase of commissioning, approximately 1.5 hours of B_4C data was taken and the results show a zero asymmetry at the 2×10^{-6} level of accuracy. The aluminum asymmetry was measured to be zero at the 0.73×10^{-6} level using about 40 hours of data.

In calculating the asymmetry for the entire period, one asymmetry was calculated

for each detector pair and time bin and over any valid sequence of 8 macro pulses with the correct neutron spin state pattern. A so-called valid 8 step sequence of spin states is defined as $(\uparrow\downarrow\downarrow\uparrow\downarrow\uparrow\downarrow)$. Using this pattern suppresses first and second order gain drifts within the sequence. Some 8 step sequences may become invalid due to missing pulses in the DAQ.

A pair of detectors is defined as shown in Fig.1. If we let $(U_\uparrow, U_\downarrow$ or $D_\uparrow, D_\downarrow)$ denote the sum of all four signals with the corresponding spin states in a given spin sequence, then the detector pair asymmetry for a given time bin is calculated from

$$A_{raw}(t_i) = \frac{U_\uparrow - D_\uparrow - U_\downarrow + D_\downarrow}{U_\uparrow + D_\uparrow + U_\downarrow + D_\downarrow}. \quad (2)$$

This method of calculating the asymmetry allows for automatic subtraction of pedestals and any additive background. Signal fluctuations that are not correlated with the switching of the neutron polarization direction will average out and don't contribute to any asymmetry. Possible false asymmetries due to electronic pickup and possible magnetic field induced gain changes in the detector VPDs have previously been measured and are consistent with zero to within 5×10^{-9} [6].

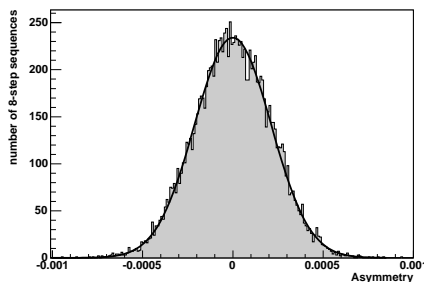


Figure 3: Up-Down gamma-ray asymmetry for ~ 1.5 hours of ^{10}B data. From the fit, the asymmetry is $(-0.2 \pm 1.9) \times 10^{-6}$.

The asymmetry was then divided by the neutron polarization and the cosine of the corresponding detector pair angle. For each detector pair the resulting time bin physics asymmetries within a sequence were combined by calculating an error weighted average over the time of flight selected for analysis (13 ms through 34 ms). A 48% ^3He polarization was calculated from the monitor ratios and was seen to be stable over the analyzed runs.

The spin-flipper efficiency was taken to be 100% over the analyzed time of flight range. The resulting physics asymmetry for each valid 8 step sequence was then histogrammed to produce the total asymmetry. The results for the asymmetry are shown in figure 3.

The asymmetry on aluminum was calculated using the same method. The results are shown in Fig.4.

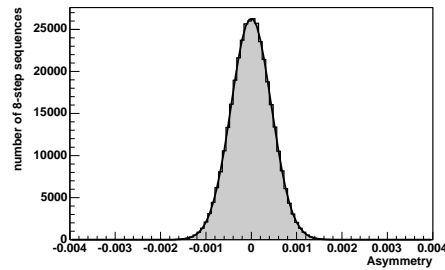


Figure 4: Up-Down gamma-ray asymmetry for ~ 40 hours of ^{27}Al data. From the fit, the asymmetry is $(-0.95 \pm 0.73) \times 10^{-6}$.

4 Conclusion

The NPDGamma experiment successfully completed a commissioning run in April 2004. The CsI detector array was demonstrated to be sufficiently low noise to allow operation at counting statistics. The array was used to perform measurements of asymmetries in neutron capture in gamma-ray emission following capture on ^{10}B and ^{27}Al . Given the thickness of the targets used and the amount of actual material that is estimated to interact with the neutrons, about 10% of the signal seen with the hydrogen target will be due to aluminum while about 1% comes from boron. The amount of aluminum data analyzed corresponds to about 1/3 of the data taken during the commissioning run. Taking these factors into account and using all collected data, we will be able to show that neither material is going to contribute a false asymmetry in the background signal of the NPDGamma apparatus. The CsI detector array is fully commissioned and prepared for production data taking with the hydrogen target.

References

- [1] S. A. Page *et al.*, PMSN Conference proceedings, NIST Journal of Research (2004).
- [2] J. Bowman *et al.*, Measurement of the parity-violating gamma asymmetry A_γ in the capture of polarized cold neutrons by para-hydrogen, $\vec{n} + p \rightarrow d + \gamma$, Tech. Rep. LA-UR-99-5432, Los Alamos National Laboratory (1999).
- [3] M. Snow *et al.*, Measurement of the parity-violating asymmetry A_γ in $\vec{n} + p \rightarrow d + \gamma$, Nucl. Instr. and Meth. A 440, (2000) 729.
- [4] M. Snow *et al.*, Progress toward a new measurement of the parity-violating asymmetry in $\vec{n} + p \rightarrow d + \gamma$, Nucl. Instr. and Meth. A 515, (2003) 563.
- [5] G. S. Mitchell *et al.*, A measurement of parity violating gamma-ray asymmetries in polarized cold neutron capture on ^{35}Cl , ^{113}Cd and ^{139}La , Nucl. Instr. and Meth. A 521 (2004) 468.
- [6] M. T. Gericke *et al.*, The NPDGamma Detector Array, submitted in 2004 to Nucl. Instr. and Meth. A.
- [7] W. S. Willburn, J. D. Bowman, M. T. Gericke, S. I. Penttilä, The NPDGamma Low-Noise Preamplifier, submitted in 2004 to Nucl. Instr. and Meth. A.
- [8] P-N. Seo *et al.*, A measurement of the flight path 12 cold H_2 moderator brightness at LANSCE, Nucl. Instr. and Meth. A 517 (2004) 285.
- [9] W. B. Davenport, W. L. Root, An Introduction to the Theory of Random Signals and Noise, John Wiley & Sons, New York, 1987.